


TV camera protection with fixed or variable lens against adverse environmental effects in moderate climate



housings

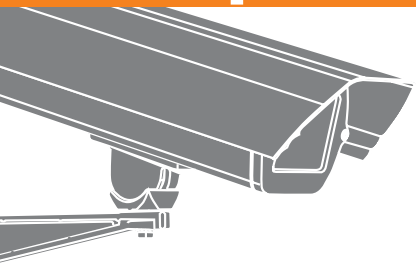

1

Heaters are located nearby sight glass

2

Sealing gaskets are made of special aviation rubber





Tested operating range of ambient temperature: -35°C..+40°C



Class of protection against environmental impacts: IP66 (complete dust protection; protection against water jets from any direction)



Reliable and timely switching on and switching off of heater equipped with optic switch and temperature detector



Galvanic transformer power supply decoupling, in-built TV-camera power supply



Heaters are located nearby sight glass



Sealing gaskets are made of special aviation rubber



Low power consumption

model	Efficient useful volume, mm	Input voltage to the housing, V	Voltage to be supplied to the TV camera, V
WHE26	190x73x66	220AC or 24AC	9DC or 12DC or 24AC
WHE26-12V	200x73x66	9..18DC	9DC or 12DC
WHE26-42V	190x73x66	42AC	9DC or 12DC or 24AC
WHE32	250x73x66	220AC or 24AC	9DC or 12DC or 24AC
WHE32-12V	260x73x66	9..18DC	9DC or 12DC
WHE32-42V	250x73x66	42AC	9DC or 12DC or 24AC